

ICETECH

ICETECH
DRY ICE BLAST EQUIPMENT



IceBlast KG20



IceBlast KG6



IceBlast KG6 Basic




ICEBLAST BATTERY SERIES

Dry Ice Blasting



01 : 02 : 03 : 04 : 05 : 07

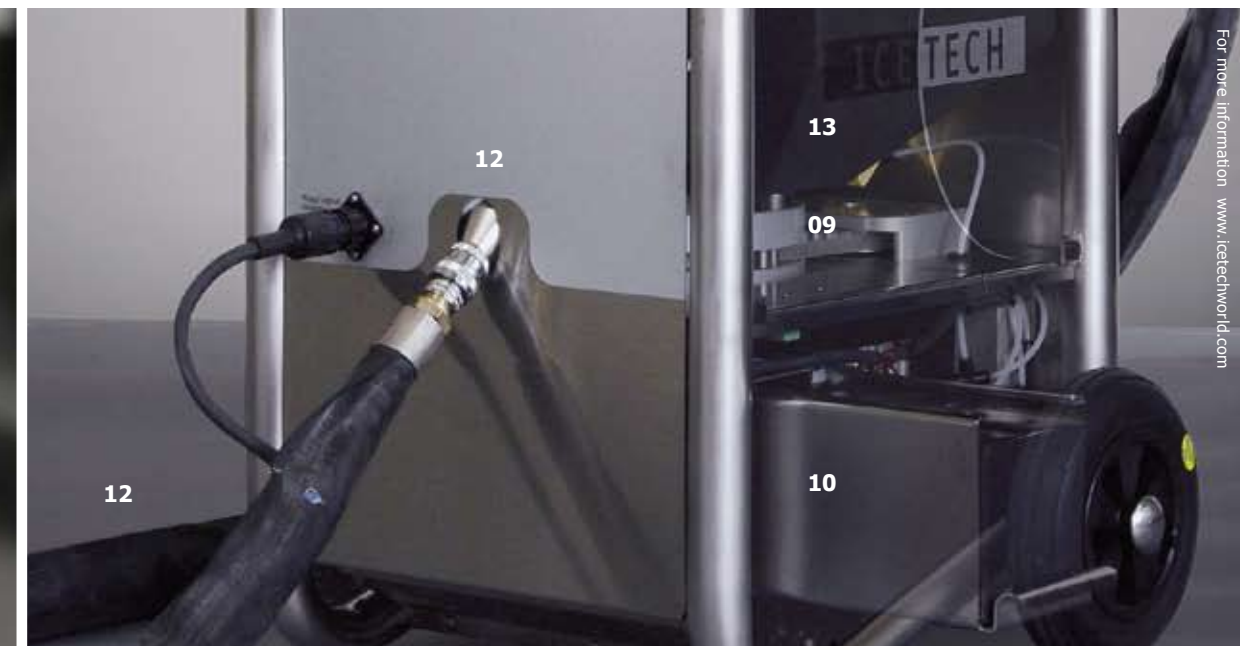

09 : 10 : 12 : 13

The battery models are ideal for end users that need the equipment for certain repetitive and easy cleaning tasks which neither require high-pressure levels nor long continuous periods of operation.

The jobs can be carried out satisfactorily using the compressors that are normally available at small factories, workshops, garages, etc. provided that the air is sufficiently dry and clean.

Examples of ideal applications for the IceBlast battery models are:

- :: Degreasing of tools, moulds, etc.
- :: Cleaning of switchboards, printed circuits, etc.
- :: Cleaning of car engines (injection valves on cylinder heads, especially on diesel driven motors)
- :: General maintenance at workshops and garages
- :: General maintenance in food industries



13
CE

ICEBLAST BATTERY SERIES

For Dry Ice Blasting

Dry ice blasting is a revolutionary blasting method that uses dry ice pellets with a diameter of 3 mm (rice-sized) as the blasting media. The pellets consist of solid CO₂ at a temperature of -79°C/-110°F. The process is very environmentally friendly and provides a fast and effective alternative to traditional methods of cleaning industrial production equipment.

- 01: User-Friendly Control Display**
The control panel includes adjustment, and display of the dry ice consumption as well as of the blasting pressure.
- 02: Blasting Pressure Display**
- 03: Adjustment of Blasting Pressure**
- 04: Emergency Stop**
Cuts the power supply and all machine operations.

- 05: Digital Control Display**
User-friendly control display, for adjusting the pellet consumption and the compressed air pressure with error-log indication (only KG20, for KG6 please see 08:).
- 06: Battery Indicator**
The battery indicator displays the battery level currently, ensuring easy check-up of battery status during operation.

- 07: Safety Instructions**
Safety instructions with symbolic and textual explanations give the operator an instant and comprehensive overview of the safety precautions.

- 08: Pellet Consumption / Air Pressure**
Potentiometer for adjusting pellet consumption. Manometer showing compressed air pressure (only for KG20 and KG6).

- 09: Self-Adjusting Dispensing System**
One of the reasons for the very high efficiency of the machine is the patented self-adjusting dispensing system that requires a minimum of maintenance.

- 10: Handy Interchangeable Battery**

- 11: Light Gun**
The KG20 is prepared for Light Gun. It is ergonomically designed and weighs only 700 g / 1.54 lbs.
 - Light
 - Safety switch
 - Two-step trigger
 - Blasting with dry ice AND air
 - Or blasting with AIR ONLY
 The blasting guns are built up of modules and can be adapted to suit any task.

- 12: Blasting Hose**
The blasting hose is made of a supple fibre-reinforced silicone tube with a protective sleeve. Quick couplings allow swift connection to the machine.

- 13: Pellet Tank**
The pellet tank made of acid-resistant stainless steel and fully insulated with closed-cell polyethylene foam is suspended in rubber fittings allowing it to vibrate freely.

- 14: Special Nozzles and Handles**
A broad range of accessories can be supplied for the blasting gun, ensuring maximum efficiency. Easy to operate even with gloved hand.



08



09



10



11



14



Head Office Denmark
IceTech A/S
Industrivej 62
DK-6740 Bramming
Phone: +45 76 56 15 00
Fax: +45 76 56 15 09
E-mail: icetech@icetechworld.com
www.icetechworld.com

Head Office United States
IceTech America Inc.
5217 Muhlhauser Road
West Chester, OH 45011 USA
Phone: (+1) 513-942-4144
Fax: (+1) 513-942-4244
Toll free: (+1) 877-693-7073
E-mail: icetech-usa@icetechworld.com
www.icetechworld.com

Head Office Germany
IceTech Deutschland GmbH
Breitenloher Weg 29
DE-91166 Georgensgmünd
Phone: 0800 4238 324
Fax: +49 (0) 9172 667 569
E-mail: icetech@icetechworld.de
www.icetechworld.de

TECHNICAL DATA

KG20

Dim. mm/inch

Length: 480 / 18.8

Width: 520 / 20.4

Height:

incl handle

1030 / 40.5

Height:

w/ handle folded down

850 / 33.4

Weight

kg 58

lbs: 127.8

Dry Ice Capacity

kg: 20

lbs: 44

Dry Ice Consumption

kg/h: 16 - 55

lbs/h: 36 - 122

infinitely adjustable

Supply Pressure

bar: min. 5 - max. 10

psi: min. 72 - max. 145

Blasting Pressure

bar: min. 2 - max. 10

psi: min. 29 - max. 145

Prepared for Light Gun

Air Consumption

m³: 0.7 - 5

cfm: 25 - 175

depending on nozzle
combination

Compressed Air Connection

3/4" claw coupling

The compressed air must be
kept clean and free of oil,
foreign bodies and water

Power Consumption

110/230 V

AC 50-60 Hz

24V handy interchangeable
battery, and battery charger

Single Hose System

Noise

Noise level 60-120 dB(A)
depending on blasting pres-
sure, nozzle combination and
material surface

**User-Friendly Control
display w/ error-log
indication**

KG6

Dim. mm/inch

Length: 480 / 18.8

Width: 520 / 20.4

Height:

incl handle

930 / 36.6

Height:

w/ handle folded down

650 / 25.6

Weight

kg: 50

lbs: 110

Dry Ice Capacity

kg: 6

lbs: 13

Dry Ice Consumption

kg/h: 15 - 40

lbs/h: 33 - 88

infinitely adjustable

Supply Pressure

bar: min. 5 - max. 10

psi: min. 72 - max. 145

Blasting Pressure

bar: min. 2 - max. 10

psi: min. 29 - max. 145

Not Prepared for Light Gun

Air Consumption

m³: 0.7 - 5

cfm: 25 - 175

depending on nozzle
combination

Compressed Air Connection

3/4" claw coupling

The compressed air must be
kept clean and free of oil,
foreign bodies and water

Power Consumption

110/230 V

AC 50-60 Hz

24V handy interchangeable
battery, and battery charger

Single Hose System

Noise

Noise level 60-120 dB(A)
depending on blasting pres-
sure, nozzle combination and
material surface

**User-Friendly Control
display**

KG6 Basic

Dim. mm/inch

Length: 480 / 18.8

Width: 520 / 20.4

Height:

incl handle

930 / 36.6

Height:

w/ handle folded down

650 / 25.6

Weight

kg: 50

lbs: 110

Dry Ice Capacity

kg: 6

lbs: 13

Dry Ice Consumption

kg/h: 20 or 40

lbs/h: 44 or 88

Fixed consumption rate
Predefined by customer

Supply Pressure

bar: min. 5 - max. 10

psi: min. 72 - max. 145

Blasting Pressure

bar: 0 - 10

psi: 0 - 145 (non-adjustable)

Not Prepared for Light Gun

Air Consumption

m³: 0.7 - 5

cfm: 25 - 175

depending on nozzle
combination

Compressed Air Connection

3/4" claw coupling

The compressed air must be
kept clean and free of oil,
foreign bodies and water

Power Consumption

110/230 V

AC 50-60 Hz

24V handy interchangeable
battery, and battery charger

Single Hose System

Noise

Noise level 60-120 dB(A)
depending on blasting pres-
sure, nozzle combination and
material surface

**User-Friendly Control
display**

Distributor